

NOTES:

1. ALL DIMENSIONS ARE FOR REF. USE ONLY.
2. PRODUCT DIMENSIONS: U.S. IMPERIAL (inches) METRIC (mm).
3. * = TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
4. INSTALLATION: THIS PUMP MUST BE INSTALLED IN AN ENCLOSURE.
5. BIASED INLET VALVES TO ALLOW STARTING UNDER LOAD.

GAST

A UNIT OF **ICX** CORPORATION
BENTON HARBOR, MI U.S.A.





PART NUMBER
RTD642B

REV.
B

SOUND LEVEL
NORMAL AMBIENT
RELATIVE HUMIDITY
ENVIRONMENT

LESS THAN 70 dB(A)
+5 deg C - +40 deg C
20% - 80%
CLEAN DUST FREE

IDEXonline

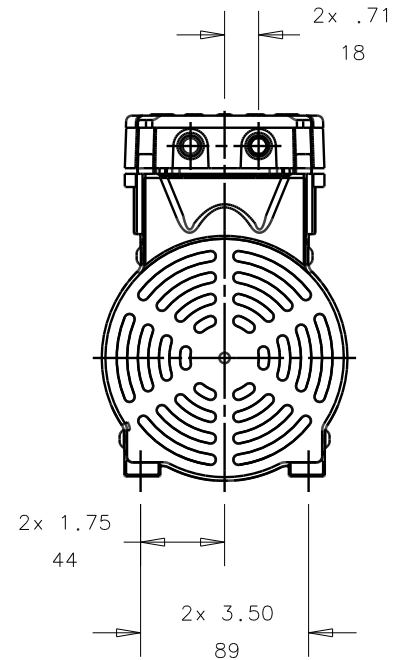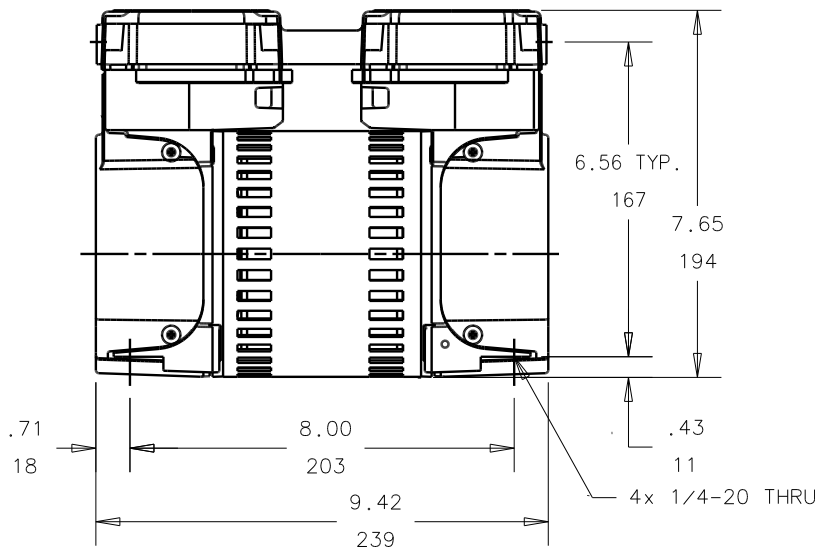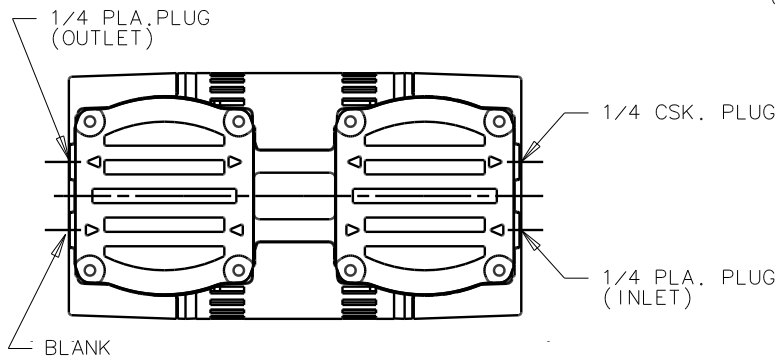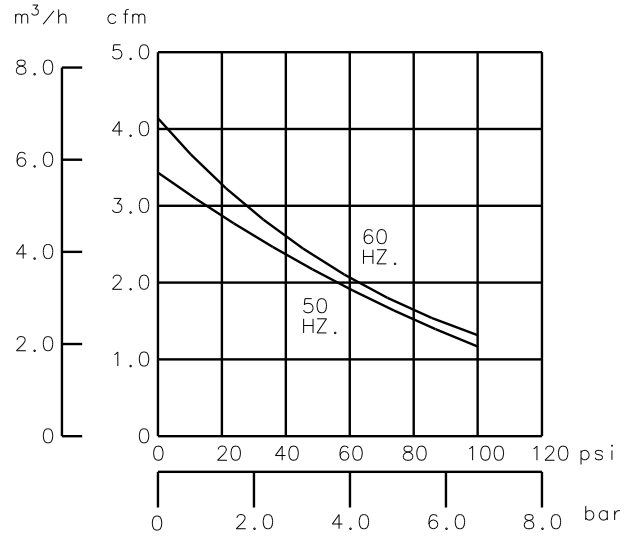

Product Specifications

MODEL NUMBER	MOTOR	RPM		HP.	kW.	NET WT.		AMPS	CAPACITOR
		60 cycle	50 cycle			lbs.	kg.		
82R642-P112-H302CX	220-240 50 HZ. 230 60 HZ.	1725	1425	1/3	0.25	17.6	8.0	2.4 2.9	10.0 mfd.