

PRODUCT SPECIFICATIONS

MODEL NO.	MOTOR	RPM		AMPS		HP	kW	NET WT.		CAPACITOR	
		60HZ	50HZ.	60HZ	50HZ			lbs.	kg	mfd.	VOLT
87R642-403R-N470X	115-120/230-240 (60Hz)	1725	1425	5.7/2.8	5.1/2.6	1/2	0.37	19.1	8.6	30	370
	110-120/220-240 (50Hz)										

SOUND LEVEL LESS THAN 65 db(A)

NORMAL AMBIENT +5 °C - +40 °C



RELATIVE HUMIDITY 20% - 80%

ENVIRONMENT CLEAN DUST FREE

NOTES:



1. TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
2. IF THE PUMP IS NOT INSTALLED IN AN INCLOSURE, A FAN COVER IS REQUIRED FOR SAFETY.
3. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
4. KIT P/N: K965

PRODUCT PERFORMANCE: 50Hz CURVES BASED ON 230V.
60Hz CURVES BASED ON 115V.

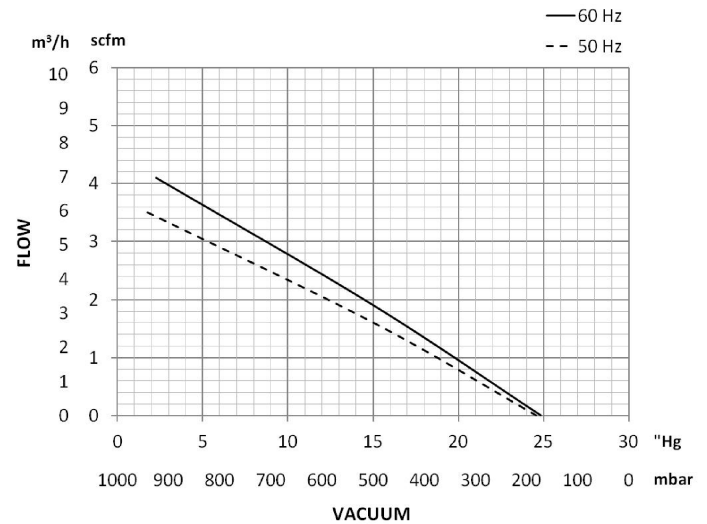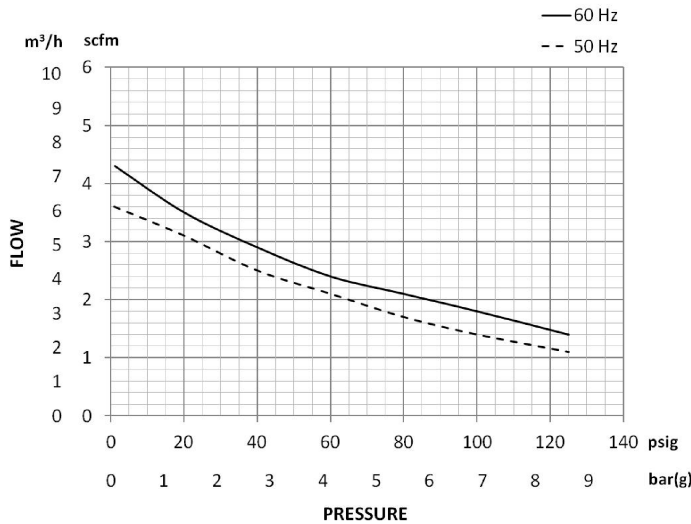


PRODUCT DIMENSIONS:


WIRING DIAGRAM 接线图

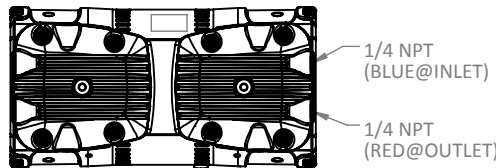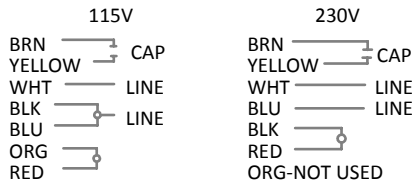

CAPACITOR MOUNTING KIT TO BE SHIPPED UNATTACHED 电容支架

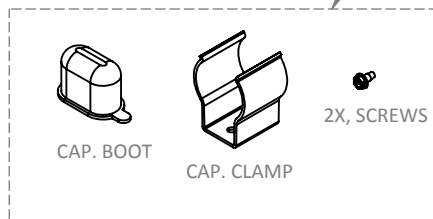

CAPACITOR TO BE SHIPPED UNATTACHED

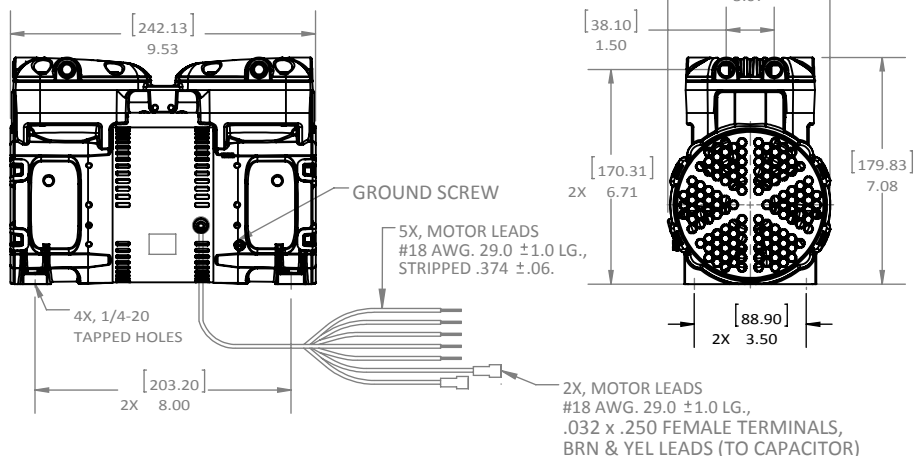

产品说明:

型号	电机电压	转速		电流		HP	kW	净重		电容	
		60HZ	50HZ	60HZ	50HZ			lbs.	kg	mfd.	VOLT
87R642-403R-N470X	115-120/230-240 (60Hz) 110-120/220-240 (50Hz)	1725	1425	5.7/2.8	5.1/2.6	1/2	0.37	19.1	8.6	30	370

噪音: <65 db(A)

正常使用环境温度: +5 °C - +40 °C



相对湿度: 20% - 80%

环境: 无尘

产品性能: 50Hz 时, 电压 230V.
60Hz 时, 电压 115V.


备注:

1. 本技术参数表如有更新恕不通知;
2. 请将泵安装在一个外壳内, 否则出于安全考虑, 请安装风扇盖;
3. 所有尺寸仅供参考;
4. 维修包料号: K965。

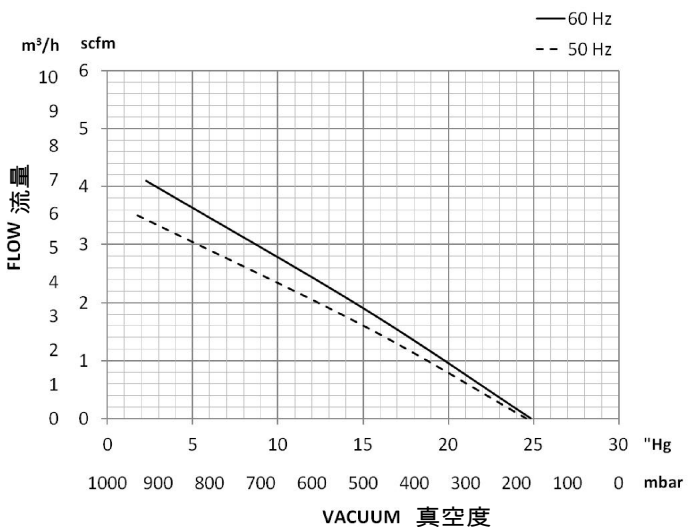
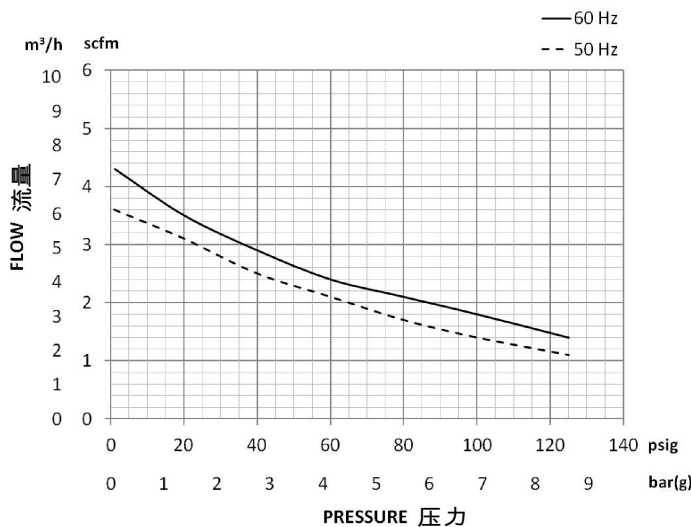


产品尺寸:



接线图

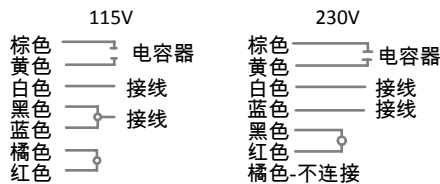

电容组件在发货时请不要安装

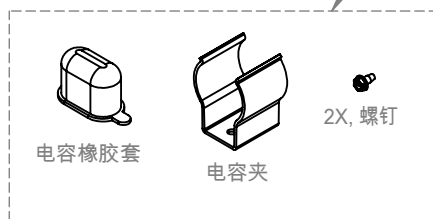

电容器在发货时请不要安装

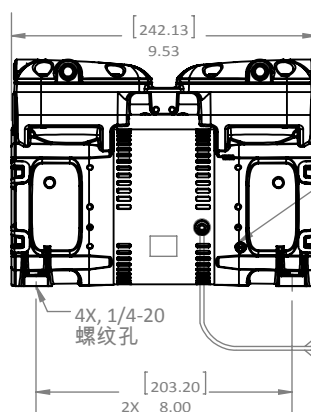

1/4 NPT
(进气口, 蓝色)

1/4 NPT
(出气口, 红色)

接地螺丝

5X, 电机接线
#18 线, 长度 29.0" ±1.0"
剥线长度 .374" ±.06"

2X, 电机接线
#18 线, 长度 29.0" ±1.0"
.032" x .250" 母头,
棕色和黄色 (接电容器用)

