

## MODEL

### 8AM-ARV-70


(4 Vanes, Reversible)  
Repair kit K282A

### 8AM-ARV-71

(8 Vanes, Reversible)  
Repair kit K282B

## FEATURES



- IEC #72 mounting frame size D90
- Any plane operation
- Muffler AC990
- II 2 GD c T5

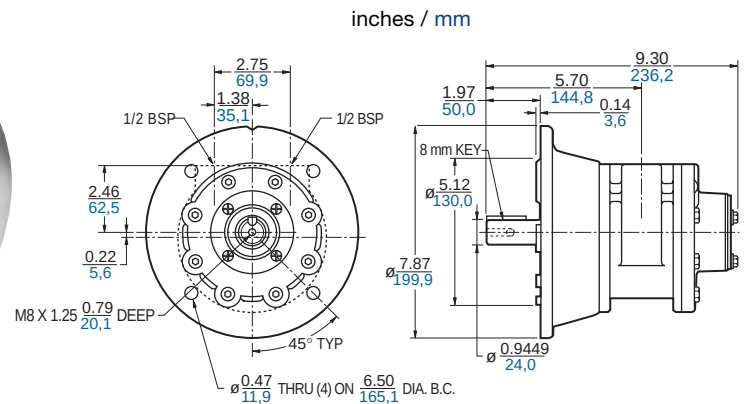



Delivers up to 3,7 kW (5 hp). Speeds may be varied from 300 to 2,500 rpm. Max. recommended operating pressure 7 bar (100 psi).

**Note:** Performance data represents a 4-vane model with no exhaust restriction.



### Output Power vs. Speed



### Torque vs. Speed



### Air Consumption vs. Speed

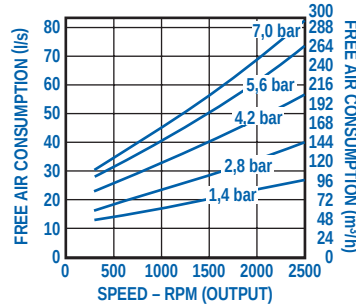



## MODEL

**8AM-FRV-2B** (4 Vanes, Reversible)

**8AM-FRV-30A** (8 Vanes, Reversible)

Net wt. 27 lbs. (12,2 kg)

## FEATURES


- Foot mounting
- Any plane operation
- Muffler AC990
- II 2 GD c T5

## RECOMMENDED

- Filter AH106F
- Regulator AH107R
- Gauge AA806
- Lubricator AH108L
- Muffler AG600 – above 1,000 rpm
- Oil AD220 – 1 quart (.94 litres)
- Repair kit K210 (4 Vane)
- Repair kit K283 (8 Vane)



inches / mm

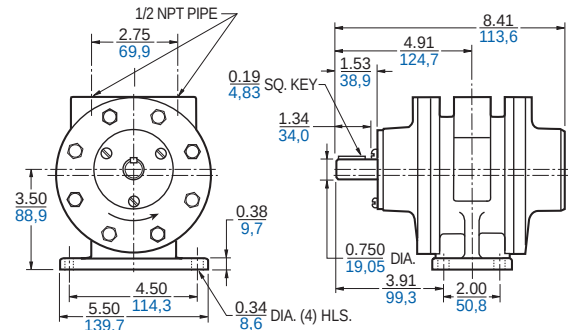

**8AM-NRV-5B** (4 Vanes, Reversible)

**8AM-NRV-42A** (8 Vanes, Reversible)

Net wt. 28 lbs. (12,6 kg)

## FEATURES


- Face mounting
- Any plane operation
- Muffler AC990
- II 2 GD c T5

## RECOMMENDED

- Filter AH106F
- Regulator AH107R
- Gauge AA806
- Lubricator AH108L
- Muffler AG600 – above 1,000 rpm
- Oil AD220 – 1 quart (.94 litres)
- Repair kit K210 (4 Vane)
- Repair kit K283 (8 Vane)



inches / mm

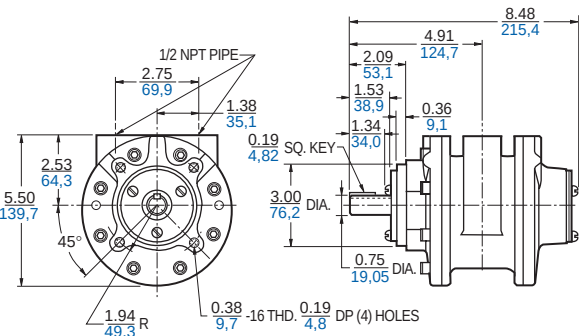

**8AM-NRV-28A** (4 Vanes, Reversible)

**8AM-NRV-32A** (8 Vanes, Reversible)

Net wt. 28 lbs. (12,6 kg)

## FEATURES

- NEMA 145TC mounting
- Any plane operation
- Muffler AC990
- II 2 GD c T5

## RECOMMENDED

- Filter AH106F
- Regulator AH107R
- Gauge AA806
- Lubricator AH108L
- Muffler AG600 – above 1,000 rpm
- Oil AD220 – 1 quart (.94 litres)
- Repair kit K211 (4 Vane)
- Repair kit K282 (8 Vane)



inches / mm

