



传感器 | 控制仪表 | 推拉力计 | 扭力计

www.sensortop.cn

特梅勒-托利多称重传感器 *slb615d*® 流程



规格- *slb615d*® 流程

最大秤量 220kg - 4.4t (500lb - 10000lb)

材质 不锈钢

应用平台、平台秤、仓、罐、料斗、输送机


附件底座盒、Foot Kit、伸缩振动工具包可用于 *swb605 powermount™*

电缆长度 3M, 5M, 10m

保护类密封 *sealed*, 激光焊接, IP68、IP69K

认证 OIML C3、C6、C10、NTEP III M 5000, 10000

防爆认证 ATEX 和 FM 标准在每个负载细胞

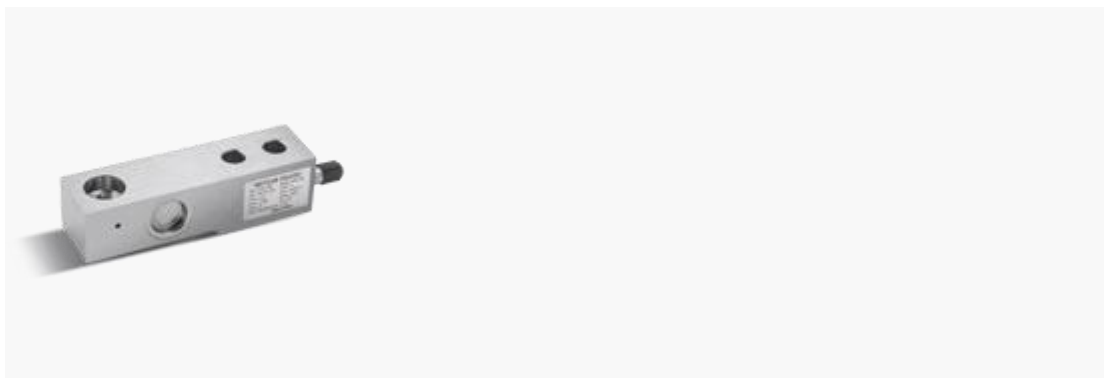

SLB615D POWERCELL® in OIML C10


Use the SLB615D load cell in platform and floor scales when accuracy matters. SLB615D

POWERCELL® provides extremely high accuracy up to OIML C10 which is three times better than usual.



传感器 | 控制仪表 | 推拉力计 | 扭力计

www.sensortop.cn

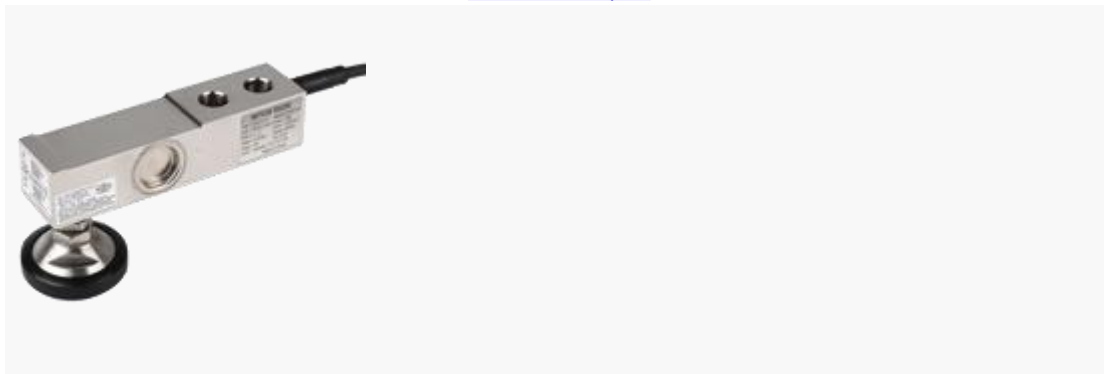


SLB615D with FKT

The Foot Kit (FKT) can be used for Floor Scale application when high accuracy matters.


The Foot Kit (FKT)

- Rocker Pin load introduction for high accuracy
- Copes with deck deflection
- Height adjustable
- Replaceable rubber pad
- slight shock / vibration damping function

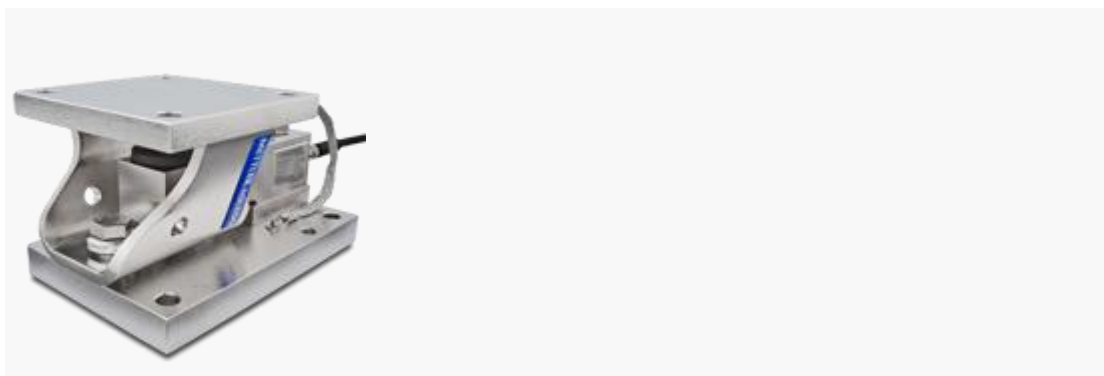

Predictive Maintenance

The PowerMount™ system constantly monitors load cell performance and alerts the user prior to serious trouble. This keeps you in control of your process and avoids faulty batches and huge follow-up costs.

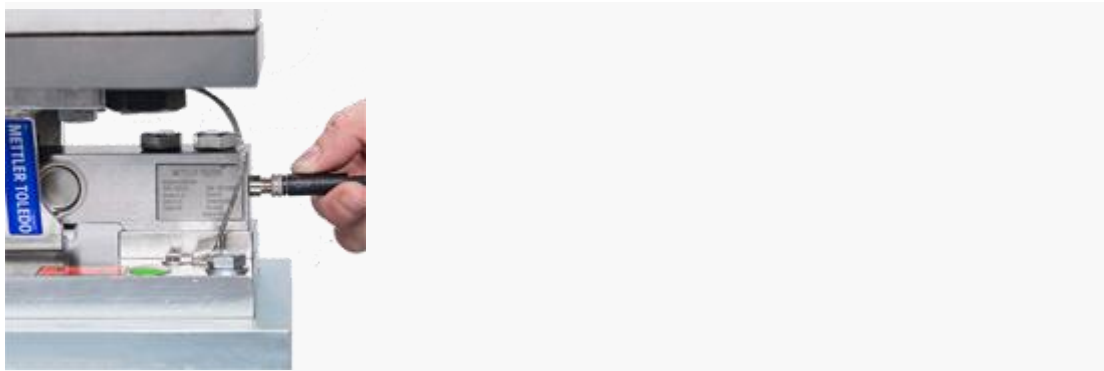



传感器 | 控制仪表 | 推拉力计 | 扭力计

www.sensortop.cn

Cables and Connectors

POWERCELL® load cells are easy to install, connecting to one another in a simple daisy-chain network. Data transmission is via CAN Bus for a very robust digital signal.