



传感器 | 控制仪表 | 推拉力计 | 扭力计

www.sensortop.cn

特梅勒-托利多 *slb515* 螺纹不锈钢称重传感器



slb515 螺纹不锈钢称重传感器

不锈钢密封荷重传感器

slb515 是一个线程负载介绍密封不锈钢传感器。它通常用于工业环境中的油罐称重和地板秤。可用容量为 110, 220, 550kg 和 1.1、2.2, 与 4.4T。

规格 - *slb515* 螺纹不锈钢称重传感器

最大秤量出栏 4.4t (500lb - 10000lb)

材质不锈钢

应用平台、平台秤、仓、罐、料斗、输送机

附件底座盒、Foot Kit、伸缩振动工具包

电缆长度 3M, 5M, 10m

保护类密封 *sealed*, 激光焊接, IP68、IP69K

认证 OIML C3, NTEP III M 5000

防爆认证 ATEX 认证, 每个负载细胞 FM 标准



SLB515 with Threaded Load Introduction

Use the SLB515 load cell in platform and floor scales. Due to the hermetic welded design the SLB515 is ideal for harsh environments in process and food applications. The full set of approvals provides maximum applicability and safety in these applications.

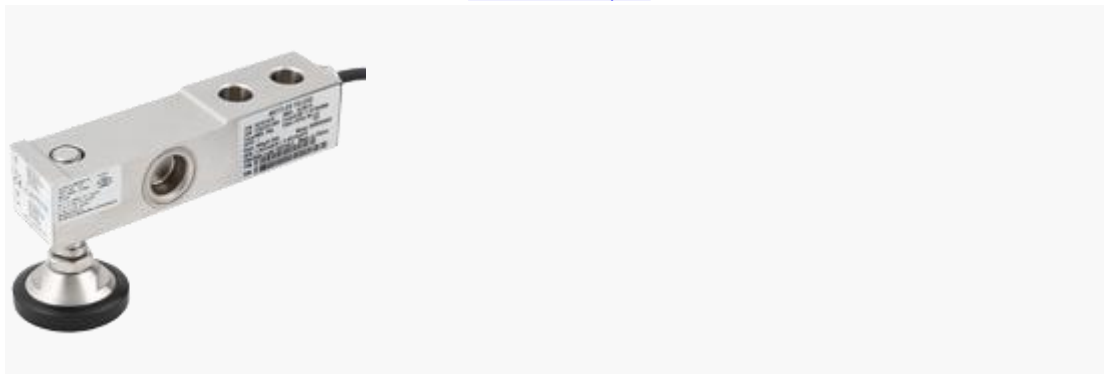


SLB515 with EVKT and Base-Plate

The Expansion and Vibration Kit (EVKT) in combination with a base plate is a cost-effective solution but without any safety feature!

The Expansion and Vibration Kit (EVKT) contains of:

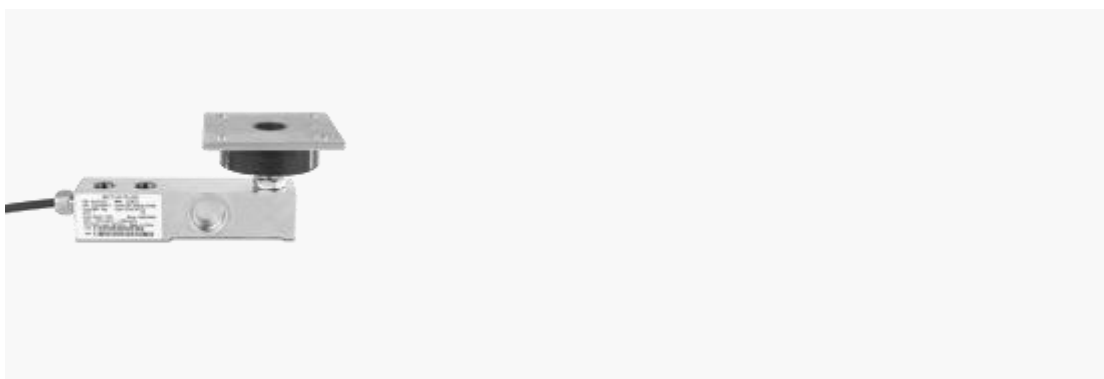
- Rubber layers sandwiched between metal plates
 - NITRILE NBR rubber
- Square-plate interface for bolting
 - Stainless steel (420)
- Polyethylene foam gasket

**SLB515 with FTKT**

The Foot Kit (FTKT) can be used for Platform or Floor Scale application when high accuracy matters.

The Foot Kit (FKT)

- Threaded load introduction for high accuracy
- Copes with deck deflection
- With threaded load-introduction hole, the load cell can be used with a threaded foot for easy levelling
- Replaceable rubber pad
- slight shock / vibration damping function

**SLB515 with EVKT for top mounting**

The Expansion and Vibration Kit (EVKT) can be used for top mounting application. It is a cost-effective solution but without any safety feature! It has a low profile for direct integration into your weighing system.