

深圳市诗拓浦仪器仪表有限公司

LAUMAS 重量指示器 WEIOIML



型号:

WEIOIML

特征:

1, AISI 304 不锈钢重量指示器, 尺寸 210×140×75 毫米 (245×140×260 毫米与布拉克相连)。五键键盘 7 Indicator led.

称重传感器 | 控制仪表 | 应变测试仪

www.sensortop.cn

Tel:0755-23002259

sales@sensortop.cn

深圳市诗拓浦仪器仪表有限公司

2, 锈钢重量指示器 AISI 304 IP67, 适用于墙或柱安装。

3, 尺寸: 210 x 140 x 75 mm (245 x 140 x 260 mm, 带支撑杆的最大外壳)。带红色 LED 的半字母数字显示屏, 20 毫米 6 位数字, 7 段。

4, 带五个功能键的防水键盘。内部可充电电池 6V 4Ah, 带 230VCA 网线。固定 IP67 连接

5, 六位半字母数字 LED 显示屏 (高 20 mm), 7 段。五键防渗透键盘。带 230Vac 电源线的 6V 4Ah 可充电内部电池。

6, IP67 防水连接。

规格:

- 1, 可能的安装: 墙、柱、桌
- 2, 六位红色 LED 显示屏, 高度 20 mm
- 3, RS232 端口
- 4, OIML R76:2006 批准, 三级, 3000 除数。
- 5, 显示范围: -2000; +999999

功能:

可打印毛重、净重、皮重 (日期、时间、客户标志/标题, 带打印机 STAVT, 见第 190 页)。-正在计数。-总计。-细分功能 (1/10e)。-净/总功能 (用于手动配料)

技术特征:

- 1, 供电与消耗: 230VAC +/- 10 % ; 12 W
- 2, 重传感器数量•称重传感器供应: 5VDC / 150 mA
- 3, 线性度•模拟输出线性度: <0.01% full scale
- 4, N. 十进制: 0 - 3 ;
- 5, 第二次转换: 20 / sec.
- 6, 串行端口: RS232

称重传感器 | 控制仪表 | 应变测试仪

www.sensortop.cn Tel:0755-23002259 sales@sensortop.cn

深圳市诗拓浦仪器仪表有限公司

7, 波特率: 1200, 2400, 4800, 9600

8, 湿度 (无冷凝): 85%

9. 储存温度: -20°C +50°C

10, 工作温度: -10°C +40 °C

产品相关图片

CARATTERISTICHE TECNICHE		TECHNICAL FEATURES
ALIMENTAZIONE e POTENZA ASSORBITA	230VAC +/- 10 % ; 12 W	POWER SUPPLY and CONSUMPTION
N° CELLE DI CARICO IN PARALLELO	max 4 (350 ohm)	NUMBER OF LOAD CELLS IN PARALLEL
ALIMENTAZIONE CELLE DI CARICO	5VDC / 150 mA	LOAD CELL SUPPLY
LINEARITA'	< 0.01% Full Scale	LINEARITY
DIVISIONI INTERNE	max 200000	INTERNAL DIVISIONS
CAMPO VISUALIZZABILE	- 2000 ; + 999999	DISPLAY RANGE
CAMPO DI MISURA	- 10 mV ; + 15 mV	MEASURE RANGE
N. DECIMALI	0 - 3 ;	DECIMALS
RISOLUZIONE LETTURA	x 1 x 2 x 5 x 10 x 20 x 50	DISPLAY INCREMENTS
LETTURE AL SECONDO	20 / sec.	READINGS / SECONDS
PORTE SERIALI	RS232	SERIAL PORTS
BAUD RATE	1200, 2400, 4800, 9600	BAUD RATE
UMIDITA' (non condensante)	85 %	HUMIDITY (condensate free)
TEMPERATURA DI STOCCAGGIO	- 20°C + 50°C	STORAGE TEMPERATURE
TEMPERATURA DI LAVORO	- 10°C + 40°C	WORKING TEMPERATURE

WEIOIML

OPZIONI A RICHIESTA :

- Colonna inox portaindicator (Ø 38 mm, h 700 mm) con staffa in acciaio inox
- Colonna inox portaindicator (Ø 38 mm, h 700 mm) con staffa in acciaio verniciato
- Verificazione prima in abbinamento a ns modulo di pesatura
- **TARATURA** dell'indicatore in abbinamento alla piattaforma con **CERTIFICATO DI RIFERIBILITÀ SIT** (idoneo sistemi ISO9000)

OPTIONS ON REQUEST :

- Indicator stainless steel stand (Ø 38 mm, h 700 mm) with stainless steel mounting bracket.
- Indicator stainless steel stand (Ø 38 mm, h 700 mm) with painted steel mounting bracket.
- Initial verification (Legal Metrology)
- **Calibration** of the weight indicator linked together with platform, **SIT traceability certificate** included.

称重传感器 | 控制仪表 | 应变测试仪

www.sensortop.cn

Tel: 0755-23002259

sales@sensortop.cn

深圳市诗拓浦仪器仪表有限公司

深圳市诗拓浦仪器仪表有限公司

INTELLIGENT JUNCTION BOXES



SHOCK PROTECTION DEVICE



CLM4ABS / CLM8ABS

CLM8INOX



The weight indicator displays the intelligent junction box functions.


Example:

LOAD DISTRIBUTION ON THE 8 INDEPENDENT CHANNELS	
1C	9.7
2C	13.8
3C	14.9
4C	8.7
5C	20.3
6C	32.5
7C	Err
8C	OFF


Load percentage on each active channel

ERROR: connection problem

OFF: channel not active

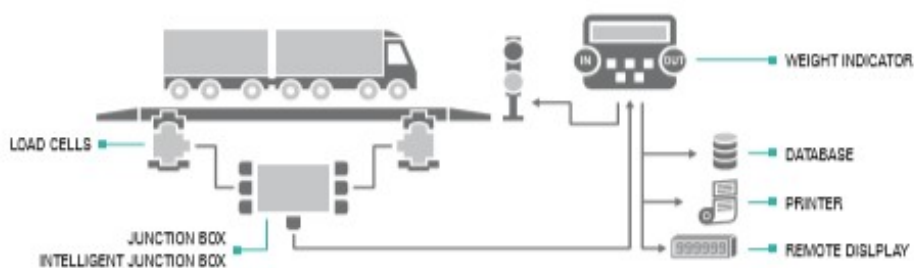

PRINTER



Supported external printers:

- Epson TM-U295
- Epson LX300
- Custom Kube II
- Laumbe STAVT II
- Other models on request.



CUSTOMIZABLE PRINTOUT





DATABASE





The trucks database allows to associate a vehicle (license plate and preset tare) to a customer identification code (ID) and to weighing data.

REMOTE DISPLAY



RS232/RS485



RIPLEDIP65

Remote display with traffic light function managed via serial port.

Rev. 00 del 12/03/2015

Epson name is the exclusive property of Seiko Epson Corporation. "Custom" name is the exclusive property of Custom Group SpA.

The Company reserves the right to make changes to the technical data, drawings and images without notice.

称重传感器 | 控制仪表 | 应变测试仪

www.sensortop.cn

Tel: 0755-23002259

sales@sensortop.cn

深圳市诗拓浦仪器仪表有限公司

深圳市诗拓浦仪器仪表有限公司