


中航微型传感器 004-G-0.3 kg

型号

004-G-0.3 kg、0.6 kg、0.75 kg、1.5kg、3kg

特点及尺寸

Dimensions mm (inch)

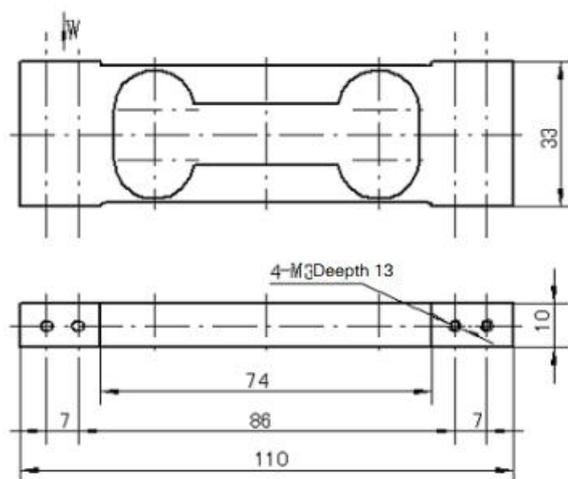

Specifications

CAPACITY	0.3 kg、0.6 kg、0.75 kg、1.5kg、3kg
COMPREHENSIVE ERROR	0.02
OUTPUT SENSITIVITY	$0.9 \pm 0.1 \text{ mV/V}$
NONLINEARITY	$\pm 0.02\% \text{ F.S.}$
REPEATABILITY	$\pm 0.02\% \text{ F.S.}$
HYSTERESIS	$\pm 0.02\% \text{ F.S.}$
CREEP	$\pm 0.02\% \text{ F.S. 30min}$
TEMP. EFFECT ON ZERO	$\pm 0.1\% \text{ F.S./}10^\circ\text{C}$
TEMP. EFFECT ON OUTPUT	$\pm 0.02\% \text{ F.S./}10^\circ\text{C}$
ZERO OUTPUT	$\pm 0.02 \text{ mV/V}$
INPUT RESISTANCE	$405 \pm 10 \Omega$
OUTPUT RESISTANCE	$350 \pm 3 \Omega$
INSULATION RESISTANCE	$\geq 5000 \text{ M}\Omega (50\text{V})$
EXCITATION VOLTAGE	$\leq 10 \text{ V}$
OPERATION TEMP. RANGE	$-10 \sim +40^\circ\text{C}$
OVERLOAD CAPACITY	150% F.S.
RECOMMENDED USE	ELECTRONIC BALANCES