


微型传感器 1P-350-G-3kg

型号

1P-350-G-3kg、5kg、6kg、8kg、10kg、12kg、20kg、35kg、40kg

特点及尺寸

Dimensions mm (inch)

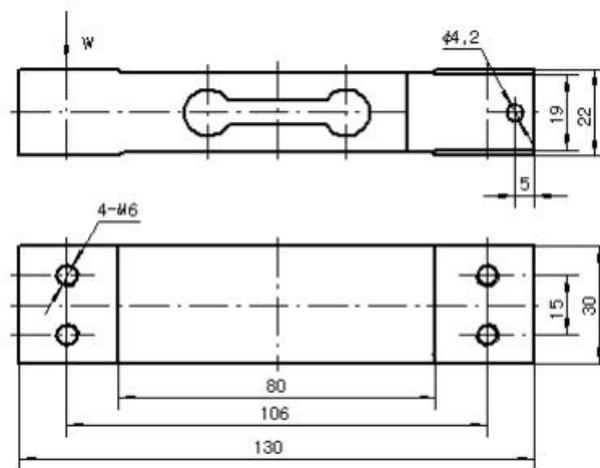

Specifications

CAPACITY	3kg、5kg、6kg、8kg、10kg、12kg、20kg、35kg、40kg
COMPREHENSIVE ERROR	0.02
OUTPUT SENSITIVITY	2.0 ± 0.2mV/V
NONLINEARITY	± 0.02% F.S.
REPEATABILITY	± 0.02% F.S.
HYSTERESIS	± 0.03% F.S.
CREEP	± 0.02% F.S.30min
TEMP. EFFECT ON ZERO	± 0.1% F.S./10°C
TEMP. EFFECT ON OUTPUT	± 0.02% F.S./10°C
ZERO OUTPUT	± 2%F.S.
INPUT RESISTANCE	405 ± 10 Ω
OUPUT RESISTANCE	350 ± 10 Ω
INSULATION RESISTANCE	≥ 3000 M Ω (50V)
EXCITATION VOLTAGE	≤ 10V
OPERATION TEMP. RANGE	-10 ~ +40°C
OVERLOAD CAPACITY	150% F.S.
RECOMMENDED USE	PLATFORM SCALES、PRICE COMPUTING SCALES