



传感器 | 控制仪表 | 推拉力计 | 扭力计

www.sensortop.cn

梅特勒-托利多轮辐式称重传感器 slc611d -流程®



slc611d -流程®

slc611d 是坦克的尺度，理想的称重料斗秤、皮带秤和混频器。摇臂销式称重传感器提供最佳的称重性能。IP68 防护等级和不锈钢设计，保证使用寿命长。slc611d 负载细胞在 7.5t, 15t 能力是可用的，22.5t

规格- slc611d -流程®

最大秤量 7.5t - 22.5t (16500lb - 49,600lb)

应用仓、罐、料斗、输送机

材质不锈钢

附件可用于 swc615 powermount™

电缆长度 12m, 20m

防爆认证准备

Protection Class Hermetically sealed, laser-welded, IP68/69K


认证 OIML C3, NTEP III M 5000

SLC611D POWERCELL®

The SLC611D load cell with capacity range from 7.5t to 22.5t allows the weighing of mid size tanks, hoppers and silos with ease.


Predictive Maintenance

The POWERCELL® technology constantly monitors load cell performance and alerts the user prior to serious trouble. This keeps you in control of your process and avoids faulty batches and huge follow-up costs.

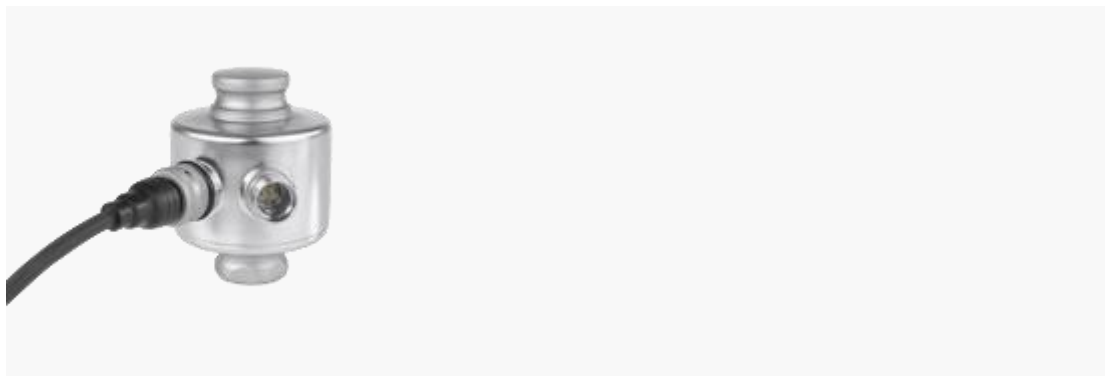

Cables and Connectors

POWERCELL® load cells are easy to install, connecting to one another in a simple daisy-chain network. Data transmission is via CAN Bus for a very robust digital signal.

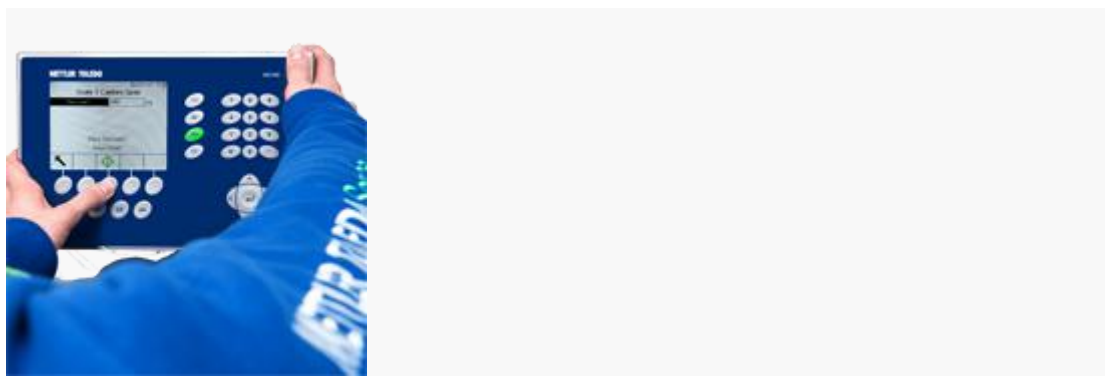

CalFree™ Plus - requires no test weight!

Sometimes calibration with test weights is impractical. PowerMount™ weigh modules can be calibrated without test weights, using the automated CalFree™ Plus system. POWERCELL® technology provides the necessary information to the terminal for a quick and low-tolerance calibration that even compensates for local gravity.

SLC611D with SWC615 PowerMount™

The SWC615 PowerMount™ weigh module is designed to provide safe and accurate weighing in all types of static and dynamic applications. We do not compromise on safety - all safety feature as standard



传感器 | 控制仪表 | 推拉力计 | 扭力计
www.sensortop.cn