



传感器 | 控制仪表 | 推拉力计 | 扭力计

[www.sensortop.cn](http://www.sensortop.cn)

## 梅特勒-托利多单点式传感器 SLP845

---



### SLP845 - 不锈钢一单点式称重传感器

适用于干燥环境中，主要用于台秤、包装秤、检重秤、食品行业和过程控制的场合。传感器容量有 15,22,50,100,200kg

规格 - *slp845* - 不锈钢一单点式称重传感器

最大称量 15kg - 200kg (32lb - 440lb)

材质不锈钢

应用台、地板、包装秤的最大平台 500x400mm

电缆长度 3m

防护等级 IP68 和 IP69K 密封



传感器 | 控制仪表 | 推拉力计 | 扭力计


[www.sensortop.cn](http://www.sensortop.cn)

认证 OIML C3, NTEP III M 5000

防爆认证 ATEX 标准在每个负载细胞

## 特点和优点

- 防护性等级为 IP68
- 长期稳定性好
- 有 OIML 和 ATEX、FM 和中国防爆认证
- 安装方便，快速
- 不锈钢材质

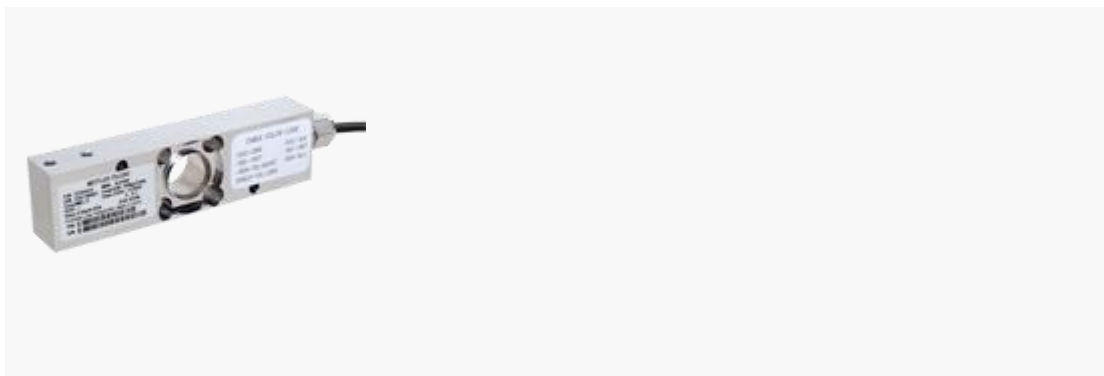

### SLP845 - Hermetic Stainless Steel Single Point Load Cell


SLP845 is stainless steel hermetic single point load cells and can be used individually in bench, floor, packaging scales with platform size 500x400mm. Made from stainless steel and its hermetical sealing allow usage in harsh environment at max. safety. Available in the capacities: 15 - 200kg.



### Wash Down Applications

SLP845 is the right choice for the food or pharmaceutical industry where daily wash down is required. It provides best weighing performance in a hermetically sealed stainless steel load cell. Thus it is ideal for stainless steel scales or

general weighing applications where the highest grade of IP protection and corrosion resistance is required.

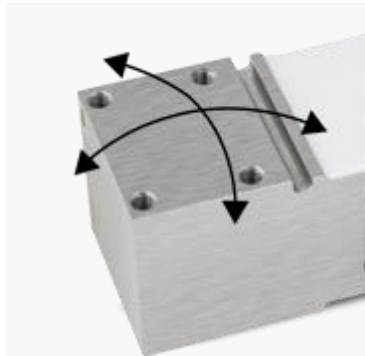

### Off-Center Compensation

One load cell can be used to support a weighing platform and due to the off-center load compensation the SLP845 will weigh within tolerance regardless of load application point.



### Robustness

SLP845 allows 50% static overload without compromising the weighing performance. The passivated aluminum provides good corrosion resistance suitable for many industrial applications.