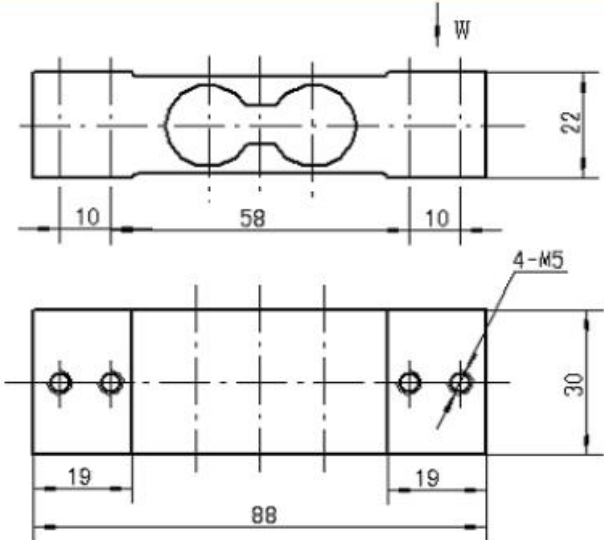


中航微型传感器 1V3-350-5kg

型号

1V3-350-5kg ， 10kg、 25kg

特点及尺寸

Dimensions mm (inch)		
		
Specifications		
CAPACITY	5kg	10kg、 25kg
COMPREHENSIVE ERROR	0.03	
OUTPUT SENSITIVITY	1.6±0.1 mV/V	2.0±0.2 mV/V
NONLINEARITY	± 0.03% F.S.	
REPEATABILITY	± 0.03% F.S.	
HYSTERESIS	± 0.03% F.S.	
CREEP	± 0.03% F.S.5min	
TEMP. EFFECT ON ZERO	± 0.5% F.S./10℃	
TEMP. EFFECT ON OUTPUT	± 0.03% F.S. /10℃	
ZERO OUTPUT	± 0.03 mV/V	
INPUT RESISTANCE	370±20Ω	
OUPUT RESISTANCE	350±5Ω	
INSULATION RESISTANCE	≥ 2000 MΩ (50V)	
EXCITATION VOLTAGE	≤ 10 V	
OPERATION TEMP. RANGE	-10~+40℃	
OVERLOAD CAPACITY	150% F.S.	
RECOMMENDED USE	PLATFORM SCALES	