

# 深圳市诗拓浦仪器仪表有限公司

## LAUMAS 称重传感器称重模块 SNODOGE-5000kg



型号:

SNODOGE-5000kg

SNODOGE-10000kg

特征:

- 1, 补偿未对准的钢制球面滑动止推轴承
- 2, 碳钢球面滑动轴承, 用于补偿支撑板的错位。

规格:

- 1,在顶板和底板之间提供铜导线连接, 然后将下底板连接到接地网
- 2,用铜线将上支撑板与下支撑板连接, 然后将所有下支撑板与接地系统连接


**称重传感器 | 控制仪表 | 应变测试仪**

[www.sensortop.cn](http://www.sensortop.cn) Tel:0755-23002259 sales@sensortop.cn


# 深圳市诗拓浦仪器仪表有限公司

## 产品相关图片


| MAX STATIC LOAD | kg | DESCRIPTION                                                                                                 | NET WEIGHT<br>(kg) | CODE           |
|-----------------|----|-------------------------------------------------------------------------------------------------------------|--------------------|----------------|
| 5000            |    | Spherical plain bearings                                                                                    | 0.07               | SNODOGE12AX    |
| 5000            |    | Kit composed by spherical bearing (cod.SNODOGE20AX),<br>galvanized bolt (20x80 mm) and washer (22x60 mm).   | 0.3                | SNODOGE20AXKIT |
| 10000           |    | Kit composed by spherical bearing (cod. SNODOGE25AX),<br>galvanized bolt (24x100 mm) and washer (26x72 mm). | 0.9                | SNODOGE25AXKIT |

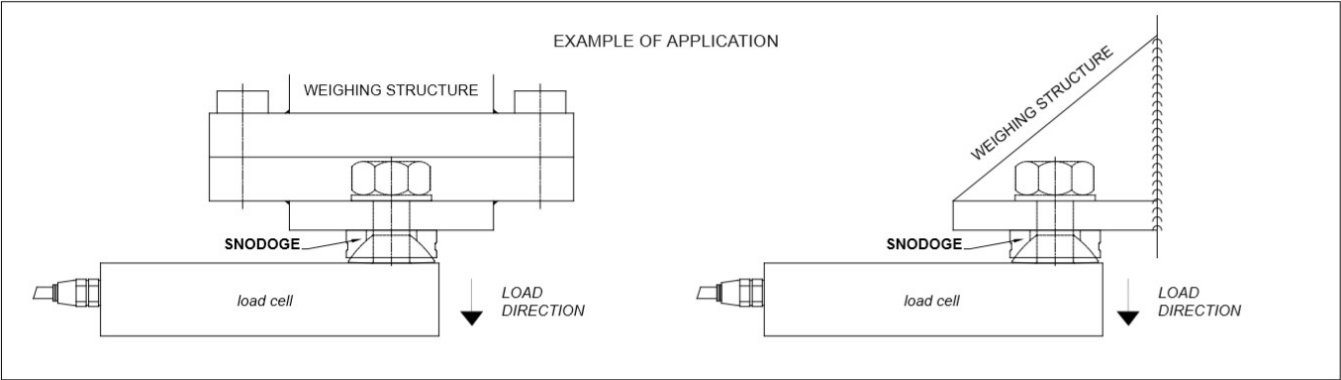


SNODOGE12AX



SNODOGE20AX

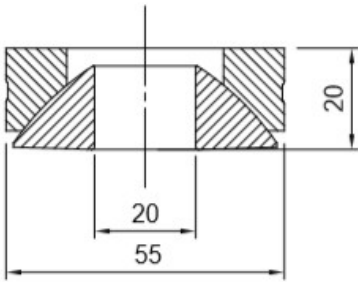


SNODOGE25AX

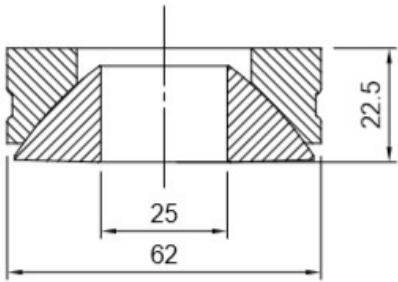


深圳市诗拓浦仪器仪表有限公司


## Application example with compression load cells

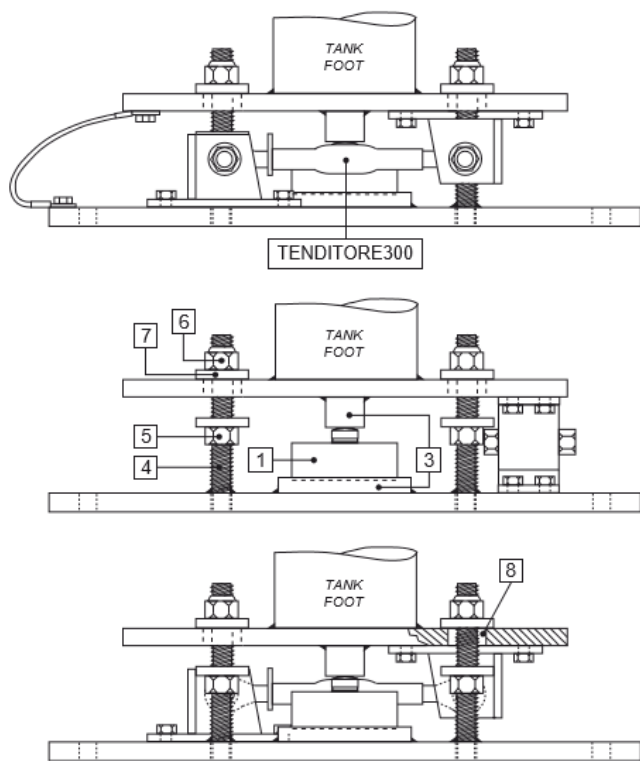

## Application example with V15000 - V30000 - V100000 mounting kits

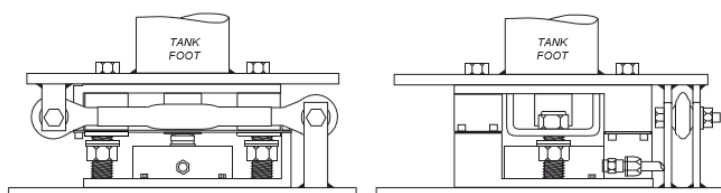


HORIZONTAL RESTRAINTS PLACEMENT ON 3/4 SUPPORTS: The restraining elements can be positioned both on supports and on the four sides, centrally between two supports.

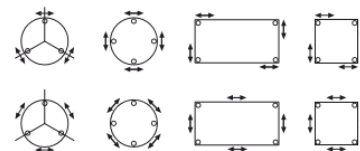


### STRUCTURE WITH 3-POINTS SUPPORT

1 RESTRAINT FOR SUPPORT




2 RESTRAINTS FOR SUPPORT




### STRUCTURE WITH 4-POINTS SUPPORT

1 RESTRAINT FOR SUPPORT



2 RESTRAINTS FOR SUPPORT



深圳市诗拓浦仪器仪表有限公司