

梅特勒-托利多单点式传感器 SSH



SSH - 不锈钢激光焊接密封传感器

SSH 单点式不锈钢激光焊接密封传感器，用于部分平台秤和地中衡。该传感器采用不锈钢制作，其激光焊接密封可适用于各种恶劣环境。传感器量程为：50, 100, 200, 500, 1000 kg.

规格 ssh - 不锈钢激光焊接密封传感器
最大秤量 50kg - 1000kg (110 磅 - 2200lb)
材质 不锈钢
应用台、地板、包装秤的最大平台 800x1200mm
电缆长度 2.5m, 6m
防护等级 IP68 和 IP69K 密封,
认证 OIML C3





传感器 | 控制仪表 | 推拉力计 | 扭力计

www.sensortop.cn


SSH - Hermetic Stainless Steel Single Point Load Cell

SSH is stainless steel hermetic single point load cells and can be used individually in bench, floor, packaging scales with platform size 800x1200mm. Made from stainless steel and its hermetical sealing allow usage in harsh environment at max. safety. Available in the capacities: 50 - 1000kg.



Wash Down Applications

SSH is the right choice for the food or pharmaceutical industry where daily wash down is required. It provides best weighing performance in a hermetically sealed stainless steel load cell. Thus it is ideal for stainless steel scales or general weighing applications where the highest grade of IP protection and corrosion resistance is required.

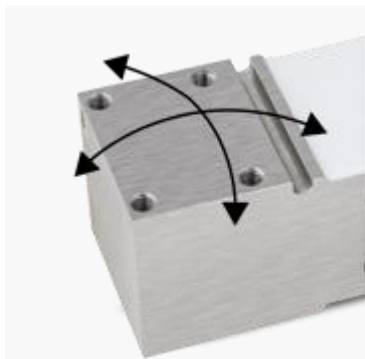

Off-Center Compensation

One load cell can be used to support a weighing platform and due to the off-center load compensation the SSH will weigh within tolerance regardless of load application point.





传感器 | 控制仪表 | 推拉力计 | 扭力计

www.sensortop.cn

Robustness

SSH allows 50% static overload without compromising the weighing performance. The passivated aluminum provides good corrosion resistance suitable for many industrial applications.

