


微型传感器 1HM-0.5kg

型号

1HM-0.5kg、1 kg 5kg、8kg、20kg

特点及尺寸

Dimensions mm (inch)

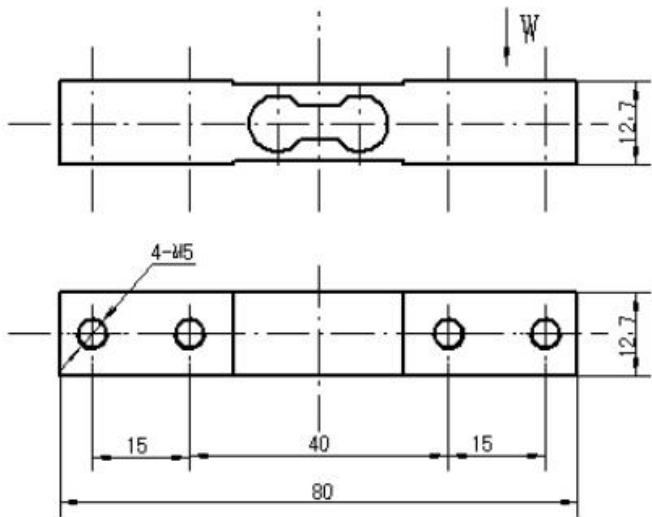

Specifications		
CAPACITY	0.5kg 、 1 kg	5kg、 8kg、 20kg
COMPREHENSIVE ERROR	0.02	
OUTPUT SENSITIVITY	1.0±0.15 mV/V	1.5±0.1 mV/V
NONLINEARITY	± 0.02% F.S.	
REPEATABILITY	± 0.02% F.S.	
HYSTERESIS	± 0.02% F.S.	
CREEP	± 0.02% F.S.5min	
TEMP. EFFECT ON ZERO	± 0.2% F.S./10℃	
TEMP. EFFECT ON OUTPUT	± 0.03% F.S./10℃	
ZERO OUTPUT	± 0.1mV/V	
INPUT RESISTANCE	1055 ± 10 Ω	
OUPUT RESISTANCE	1000 ± 10 Ω	
INSULATION RESISTANCE	≥ 2000MΩ (50V)	
EXCITATION VOLTAGE	≤ 10 V	
OPERATION TEMP. RANGE	-10~+40℃	
OVERLOAD CAPACITY	150% F.S.	
RECOMMENDED USE	KITCHEN SCALES、 POSTAGE SCALES	